




Cordoba 3 Way Pull Out Spray Filter Tap Installation Instructions

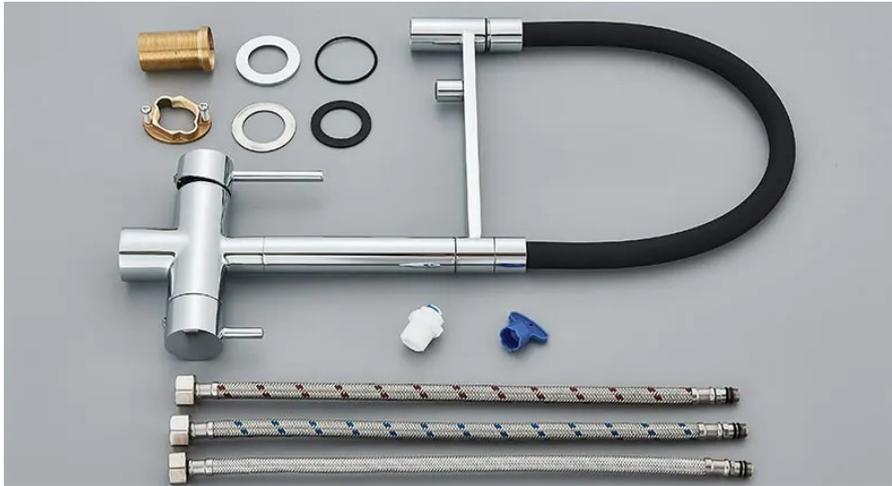

Check all components are present prior to commencing installation.

Note: The Filtered water hose is now shorter (200mm long) than the hot and cold hoses

Min/Max Working Pressure—1.5 bar-6bar. Max Water Temp—60 deg.C



* Remove the securing nuts and washers from the brass threaded piece and slide the ends of the longer hot and cold water hoses through it.

* Connect the flexible hoses as per the diagram to the tap body and tighten hand tight only.

* Screw the brass threaded piece into the tap body until it stops.

* Fit the chrome base ring onto the base of the tap, making sure sealing washer is in position and slide through worktop or sink.

* Slide rubber washer followed by the stainless steel washer up onto the underside of the sink or worktop and securely tighten the securing nut, lock into position by gently tightening the two screws.

* Fit the third filtered water connection hose through into the body of the tap and hand tighten.

* Connect the hot and cold feeds and connect the third connection to your filter (if applicable) using the supplied connector. Other size connectors are available separately.

* Turn on water supplies and flush tap thoroughly & check for leaks.

* If anything is unclear then please contact us for clarification.